



Components	
#1	Inlet ball valve (filter isolation)
#2	Outlet ball valve (static sense line)
#4F	Bermad LC filter
#26	Three way valve for manual "close", "open" & "auto"
#8	Altitude 3 way positioning pilot with opening speed regulation
#700-V	Double chamber 700 series with V port and no psring
Tubing	3/8" copper

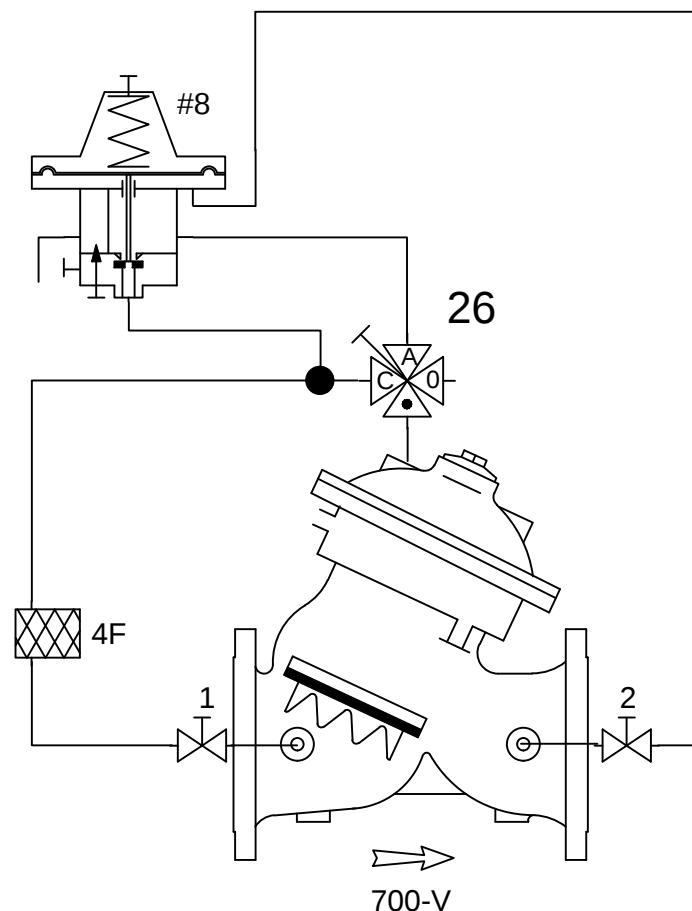

Pilot data - #8 three way positioning

Spring M6 0.2 - 1.4 bar regulation (1.0m DB)
 Spring M5 0.5 - 2.2 bar regulation (1.0m DB)
 Spring M4 1.5 - 3.5 bar regulation (1.0m DB)
 Spring M8 2.5 - 7 bar regulation (1.0 m DB)

Not to Scale



Email Address
 colin@bermad.com.au

Revision Number / Date

Bermad Water Technologies

7 Inglewood Drive , Thomastown , Vic 3074
 Ph (03) 9464 5949 Fax (03) 9464 2382

Project : **Bermad 720BXW-#8**
 Pressure reduction three way
 double chamber
 Sizes 40mm - 600mm

Drawn by :
 Date :

Drawing Number :

